

**GW-M754BH-405BB**

## Key Features



### Multi Busbar Technology

Better light trapping and current collection to improve module power output and reliability.



### Light-weight design

Light-weight design using transparent backsheet for easy installation and low BOS cost.



### Higher Power Output

Bifaciality generally allows 5-25% more power output, bringing significantly lower LCOE and higher IRR.



### PID Resistance


Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.




### Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).

**385-405 WATTS**

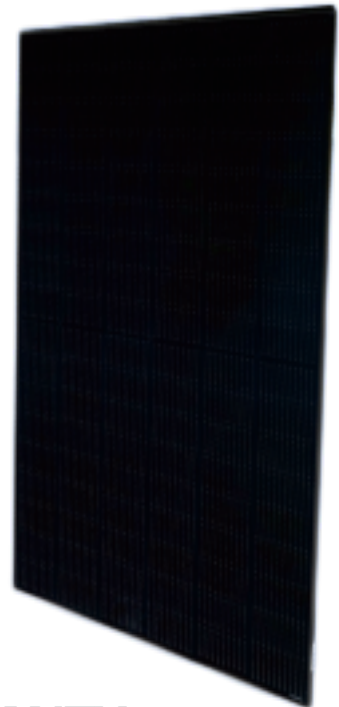

## LINEAR PERFORMANCE WARRANTY

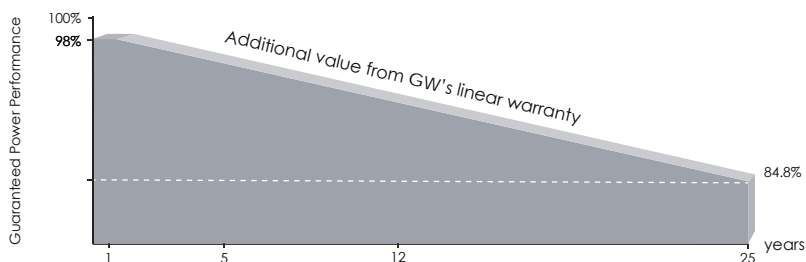

**0.55%** Annual Degradation Over 25 years



Guarantee on product material and workmanship




linear power output warranty



# Engineering Drawings

## Electrical Performance & Temperature Dependence

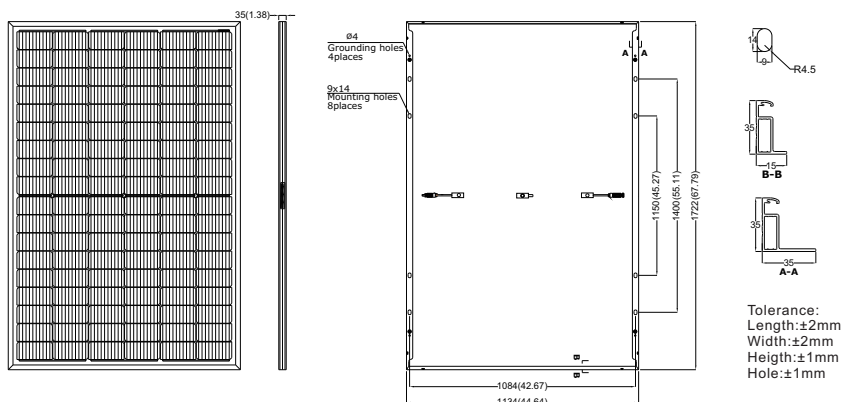

## Mechanical Characteristics

Cell Type	Mono cell (182x91mm)
No. of cells	108 (54*2) pcs
Dimensions	1722×1134×35mm
Weight	21.5 kg
Front Glass	3.2mm, AR coated tempered glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68, 3 diodes
Connector	MC4 compatiacle
Length Of Cable	4.0mm <sup>2</sup> ,400mm, or can be customized
Fire Type(Rating)	UL Type 1 / IEC Class C

\* The above drawing is a graphical representation of the product.

## Specifications

Module Type	GW-M754BH-385BB	GW-M754BH-390BB	GW-M754BH-395BB	GW-M754BH-400BB	GW-M754BH-405BB
Electrical Properties STC*					
Maximum Power (Pmax)	385W	390W	395W	400W	405W
Maximum Power Voltage (Vmp)	30.44	30.64	30.84	31.01	31.21
Maximum Power Current (Imp)	12.65	12.73	12.81	12.90	12.98
Open-circuit Voltage (Voc)	36.70	36.85	36.98	37.07	37.23
Short-circuit Current (Isc)	13.52	13.61	13.70	13.79	13.87
Module Efficiency STC (%)	19.7%	20.0%	20.2%	20.5%	20.7%
Operating Temperature( °C)			-40°C~+85°C		
Maximum system voltage			1500VDC (IEC)		
Maximum series fuse rating			30A		
Power tolerance			0~+5W		
Temperature coefficients of Pmax			-0.340%/°C		
Temperature coefficients of Voc			-0.263%/°C		
Temperature coefficients of Isc			0.054%/°C		
Nominal operating cell temperature (NOCT)			45±2°C		


\*STC (Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, AM 1.5

Electrical Properties NOCT*	385W	390W	395W	400W	405W
Peak Power (Pmax / W)	290.0	294.0	298.0	302.0	306.0
MPP Voltage (Vmp / V)	28.72	28.90	29.08	29.26	29.47
MPP Current (Imp / A)	10.11	10.18	10.25	10.32	10.38
Open Circuit Voltage (Voc / V)	34.47	34.61	34.75	34.88	35.02
Short Circuit Current (Isc / A)	10.82	10.89	10.96	11.03	11.10

\*NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

## Packaging

Pallet 31pcs / 40'HC / 806pcs

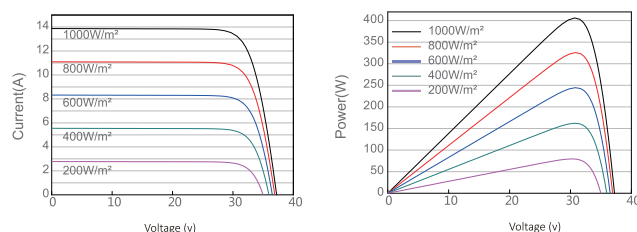

DATASHEET IS SUBJECT TO CHANGE AT ANY TIME WITHOUT APPROVAL

The specifications and key features in this datasheet may deviate slightly from our actual products due to ongoing innovation and product improvement. GW reserves the right to adjust this datasheet at any time without prior written notice. September 10th, 2022